


**AABA Segmented bends 15° R=1.5D**

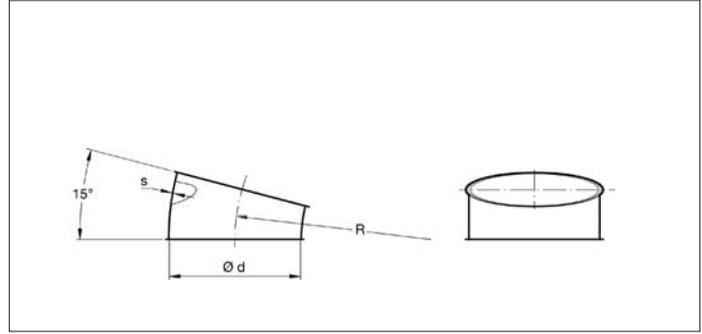

**Segmented bends 15° R=1.5D**

The segmented bends are composed of stitch-welded segments for use in under-pressure and pressureless systems.

These bends are suitable for the transport of waste materials such as dust and chips but also for the transport of grains and such.

They are produced in R=1.5D but other radiuses are available on request.

**Material**

Sendzimir galvanized DX51 DZ 275 MAC.

**Type**

Rolled sheet segments, stitch-welded with 6 mm edges for lock rings.

**Options**

- other diameters
- other radiuses
- other sheet thicknesses depending on diameter
- other types of edges or connections

Ø d mm	Code	Amount of segments	R mm	s mm	Weight kg
80	AABA000113	1	120	0.88	0.08
100	AABA000114	1	150	0.88	0.11
120	AABA000115	1	180	0.88	0.16
125	AABA000149	1	187.5	0.88	0.17
140	AABA000116	1	210	0.88	0.21
150	AABA000117	1	225	0.88	0.23
160	AABA000118	1	240	0.88	0.26
180	AABA000119	1	270	0.88	0.33
200	AABA000120	1	300	0.88	0.40
225	AABA000121	1	337.5	0.88	0.50
250	AABA000122	1	375	0.88	0.60
275	AABA000123	1	412.5	0.88	0.90
280	AABA000150	1	420	0.88	0.92
300	AABA000124	1	450	0.88	1.00
315	AABA000125	1	472.5	0.88	1.10
350	AABA000126	1	525	0.88	1.40
400	AABA000127	1	600	0.88	1.80
450	AABA000128	1	675	0.88	2.20
500	AABA000129	1	750	0.88	2.70
550	AABA000130	1	825	0.88	3.30
600	AABA000131	1	900	0.88	3.80
630	AABA000132	1	945	0.88	4.20
650	AABA000133	1	975	0.88	4.50
700	AABA000179	1	1050	1.00	5.20
750	AABA000180	1	1125	1.00	5.90
800	AABA000181	1	1200	1.00	6.70
850	AABA000182	1	1275	1.00	7.70
900	AABA000183	1	1350	1.00	8.60
950	AABA000184	1	1425	1.00	9.60
1000	AABA000185	1	1500	1.00	10.94