



AACD Branch plates at 45°

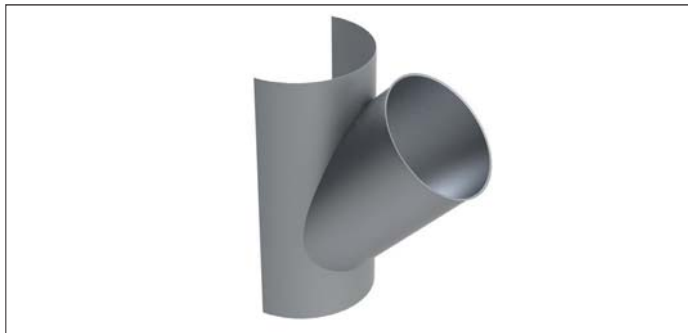

AACD Branch plates at 45°

Branches are longitudinally stitch-welded with a spot-welded side branch for use in overpressure, under-pressure and pressureless systems.

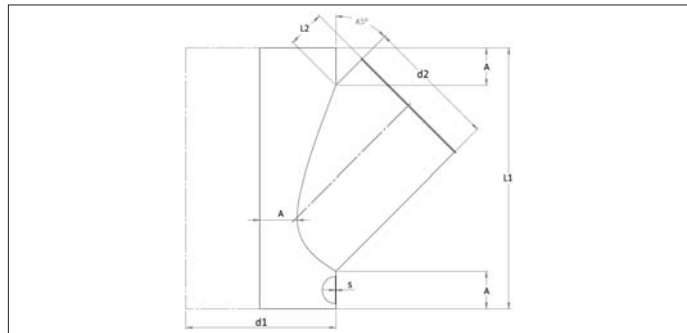

Material

Sendzimir galvanized DX51 DZ 275 MAC.

Type

Rolled stitch-welded sheets with 6 mm edges for lock rings.
Branch piece spot-welded on body with Tersotat for airtightness.

Options

- other diameters
- other sheet thicknesses depending on diameter and length
- other types of edges or connections

! Side branch ØD2 can never be bigger ØD1.

ØD1 mm	ØD2 mm	L1 mm	L2 mm	A mm	s mm
User choices from standard or modified diameters	80	213	136	50	0.88
	100	241	118	50	0.88
	120	270	130	50	0.88
	125	277	125	50	0.88
	140	298	110	50	0.88
	150	312	135	50	0.88
	160	326	125	50	0.88
	175	347	110	50	0.88
	180	355	105	50	0.88
	200	383	120	50	0.88
	220	411	135	50	0.88
	224	417	131	50	0.88
	225	418	130	50	0.88
	250	554	105	100	0.88
	275	589	150	100	0.88
	280	596	145	100	0.88
	300	624	125	100	0.88
	315	645	111	100	0.88
	350	695	146	100	0.88
	355	702	211	100	0.88
	400	766	166	100	0.88
	425	801	214	100	0.88
	450	836	224	100	0.88
	475	872	199	100	0.88
	500	907	174	100	0.88
	550	978	194	100	0.88
	560	992	184	100	0.88
	600	1049	215	100	0.88
	630	1091	185	100	0.88
	650	1119	165	100	0.88
	700	1190	221	100	0.88
	710	1204	211	100	0.88
	750	1261	171	100	0.88
	800	1331	227	100	0.88
	850	1402	176	100	0.88
	900	1473	268	100	0.88
	950	1544	253	100	0.88
	1000	1614	274	100	0.88