


AACE Trousers at 45°

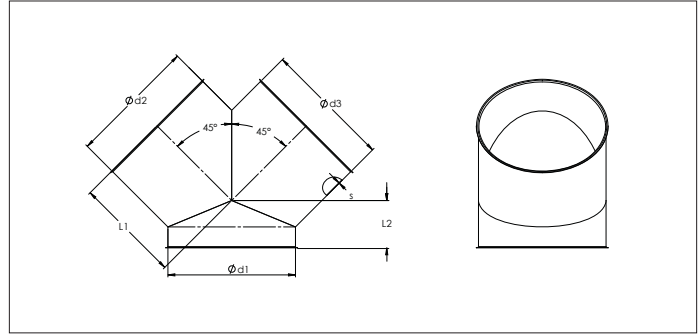

AACE Trousers at 45°

Trousers are longitudinally stitch-welded pipe pieces spot-welded together for use in overpressure, under-pressure and pressureless systems.

Material

Sendzimir galvanized DX51 DZ 275 MAC.

Type

Rollled stitch-welded sheets with 6 mm edges for lock rings.
Branch piece spot-welded on body with Tersotat for airtightness.

Options

- other diameters
- other sheet thicknesses depending on diameter and length
- other types of edges or connections

! Side branch Ød2 and Ød3 can never be bigger than ØD1.

! Side branch Ød2 and Ød3 have to be the same sizes.

Ø	Code	Ø d2/d3 mm	L1 mm	L2 mm	s mm	Weight kg
80	AACE000001	80	140	67	0.88	0.75
100	AACE000002	100	150	71	0.88	0.96
120	AACE000003	120	160	75	0.88	1.18
125	AACE000029	125	163	76	0.88	1.24
140	AACE000004	140	170	79	0.88	1.41
150	AACE000005	150	175	81	0.88	1.53
160	AACE000006	160	180	83	0.88	1.66
180	AACE000007	180	190	87	0.88	1.91
200	AACE000008	200	200	91	0.88	2.18
225	AACE000009	225	213	97	0.88	2.52
250	AACE000010	250	225	102	0.88	2.89
275	AACE000011	275	238	107	0.88	3.27
280	AACE000030	280	238	107	0.88	3.35
300	AACE000012	300	250	115	0.88	3.67
315	AACE000013	315	258	115	0.88	3.92
350	AACE000014	350	275	122	0.88	4.52
400	1AACE00015	400	300	133	0.88	5.44
450	AACE000016	450	325	143	0.88	6.42
500	AACE000017	500	350	154	0.88	7.48
550	AACE000018	550	375	164	0.88	8.61
600	AACE000019	600	400	174	0.88	9.80
630	AACE000020	630	415	180	0.88	10.55
650	AACE000021	650	425	185	0.88	11.07
700	AACE000031	700	450	195	1.00	12.40
750	AACE000032	750	475	205	1.00	13.80
800	AACE000033	800	500	216	1.00	15.27
850	AACE000034	850	525	226	1.00	16.81
900	AACE000035	900	550	236	1.00	18.42
950	AACE000036	950	575	247	1.00	20.10
1000	AACE000037	1000	600	257	1.00	22.02