
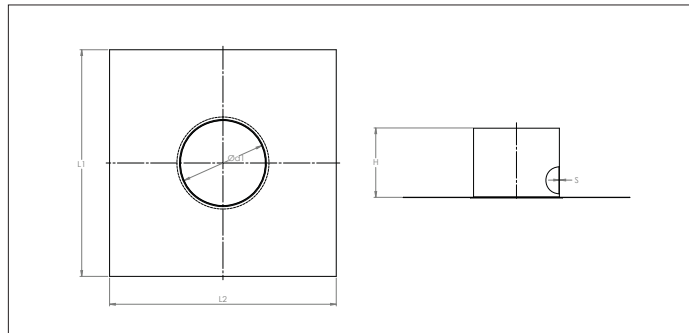


AAGD Roof passages

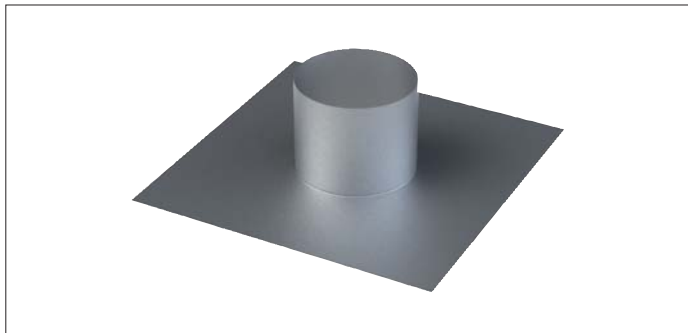

AAGD Roof passages

Roof passages are standard longitudinally welded with a stitch-welder and spot-welded on a flat plate.

They are used in combination with storm collars (AAGA) to ensure a waterproof passage of a pipe through the roof of a building.

They are designed to fit ducting with edges. It might be necessary to switch to a bigger diameter if ducting with flanges is used.

Material

Sendzimir galvanized DX51 DZ 275 MAC.

Type

Rolled stitch-welded and spot-welded sheets.

Options

- for rectangular ducting
- other diameters
- other sheet thicknesses depending on diameter

Ø	Code	Ø d2 mm	L1 mm	L2 mm	H mm	s mm	Weight kg
80 to 100	AAGD000023	125	480	480	200	0.88	1.69
120 to 125	AAGD000024	150	520	520	200	0.88	1.74
140 to 160	AAGD000001	185	550	550	200	0.88	1.75
180	AAGD000002	205	580	580	200	0.88	2.24
200	AAGD000003	225	600	600	200	0.88	2.64
225	AAGD000004	245	625	625	200	0.88	2.66
250	AAGD000005	275	650	650	200	0.88	3.10
275 to 280	AAGD000006	305	680	680	200	0.88	3.13
300 to 315	AAGD000007	340	715	715	200	0.88	4.26
350	AAGD000008	375	750	750	200	0.88	4.32
400	AAGD000009	425	800	800	200	0.88	3.89
450	AAGD000010	475	850	850	200	0.88	5.04
500	AAGD000011	525	900	900	200	0.88	5.48
550	AAGD000012	575	950	950	200	0.88	5.85
600	AAGD000013	625	1000	1000	200	0.88	6.58
630	AAGD000014	655	1030	1030	200	0.88	6.68
650	AAGD000015	675	1050	1050	200	0.88	6.89
700	AAGD000016	725	1100	1100	200	0.88	6.95
750	AAGD000017	775	1150	1150	200	0.88	8.19
800	AAGD000018	825	1200	1200	200	0.88	8.52
850	AAGD000019	875	1250	1250	200	0.88	9.08
900	AAGD000020	925	1300	1300	200	0.88	9.64
950	AAGD000021	975	1350	1350	200	0.88	10.21
1000	AAGD000022	1025	1400	1400	200	0.88	10.79