


AAZA Hose reductions

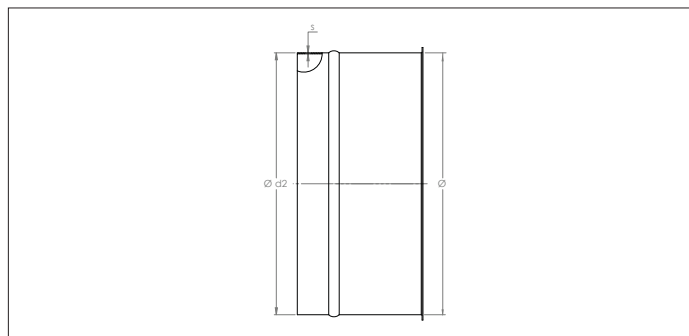

AAZA Hose reductions

Hose reduction pieces are standard longitudinally welded designed for the assembly of various types of hoses for use in overpressure, under-pressure and pressureless systems.

The exterior diameter is slightly smaller than the nominal ducting diameter to fit the flexible hose. A boom in the middle prevents the hose from sliding off.

Delivery without the hose clamp.



Assembly example

Material

Sendzimir galvanized DX51 DZ 275 MAC.

Type

Rolled sheets stitch-welded, with a 6 mm edge for lock rings.

Options

- other diameters
- other sheet thicknesses depending on diameter and length
- other types of edges or connections

Ø	Code	Ø d2 mm	H mm	s mm	Weight kg
80	AAZA000001	76	120	0.75	0.19
100	AAZA000002	96	120	0.75	0.24
120	AAZA000003	116	120	0.88	0.33
125	AAZA000023	121	120	0.88	0.35
140	AAZA000004	136	120	0.88	0.39
150	AAZA000005	146	120	0.88	0.42
160	AAZA000006	156	120	0.88	0.44
180	AAZA000007	176	120	0.88	0.50
200	AAZA000008	196	120	0.88	0.55
225	AAZA000009	221	120	0.88	0.62
250	AAZA000010	246	120	0.88	0.69
275	AAZA000011	271	120	0.88	0.76
280	AAZA000022	276	120	0.88	0.78
300	AAZA000012	296	120	0.88	0.79
315	AAZA000013	311	120	0.88	0.87
350	AAZA000014	346	120	0.88	0.97
400	AAZA000015	396	120	0.88	1.11
450	AAZA000016	446	120	0.88	1.25
500	AAZA000017	496	120	0.88	1.38
550	AAZA000018	546	120	0.88	1.52
600	AAZA000019	596	120	0.88	1.59
630	AAZA000020	626	120	0.88	1.74