


**BAAB Telescope pipes - 200 mm**

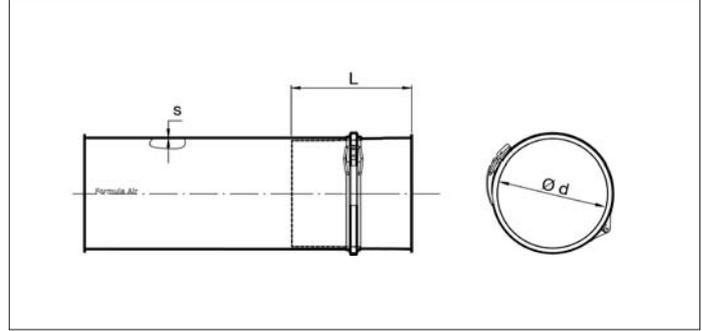

**BAAB Telescope pipes - 200 mm**

Insert pipes are standard longitudinally welded with a sheet thickness of 2.00 mm.

The ring and seal is sold separately and needs to be chosen in function of the customer requirements (rapid-lock or two-part ring and EPDM, NBR or Silicone seal, see section on rings).

The regulating length range is +20 mm to +150 mm.

**Material**

2.00 mm black steel 1.0330 powder coated in RAL 7032.  
Electrostatically conductive and food-safe powder coating thickness of 30 to 60 µm.  
Temperature resistance up to +80°C.


**Type**

Rolled sheets with 6 mm edges for lock rings.  
Ring and seal not included.

**Options**

- FDA and EU compliant food-grade quality
- hot-dipped galvanized or stainless steel execution
- equipotential equalization
- other colors
- other lengths
- other diameters
- other sheet thicknesses, depending on length and diameter
- other types of edges or connections

! Think of airflow direction when installing.

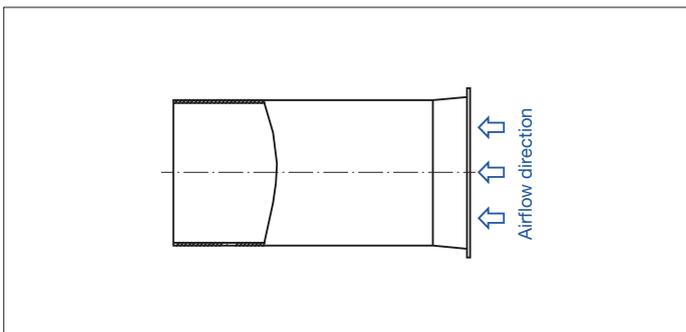

Ø d mm	Code	L mm	s mm	Weight kg
100	BAAB000054	200	1.50	0.80
120	BAAB000055	200	1.50	0.96
140	BAAB000056	200	1.50	1.16
150	BAAB000066	200	2.00	1.48
160	BAAB000067	200	2.00	1.39
175	BAAB000068	200	2.00	1.30
200	BAAB000069	200	2.00	2.00
224	BAAB000070	200	2.00	2.20
250	BAAB000071	200	2.00	2.51
280	BAAB000072	200	2.00	2.80
300	BAAB000073	200	2.00	3.02
315	BAAB000074	200	2.00	3.30