

BAAG Cleaning pipes




BAAG Cleaning pipes

Cleaning pipes are longitudinally welded with a sheet thickness of 2.00 mm.

Airtightness is insured by a silicone seal all around the lip of the door.

The inspection door is always produced with an inner plate for a smooth inner surface inside the pipe.

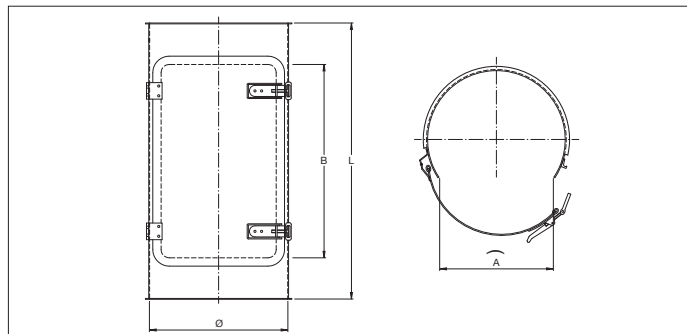

Material

2.00 mm black steel 1.0330 powder coated in RAL 7032.
Electrostatically conductive and food-safe powder coating thickness of 30 to 60 µm.
Temperature resistance up to +80°C.

Type

Rolled sheets with 6 mm edges for lock rings.
Silicone seal and adjustable locking mechanism and hinge.

Options

- FDA and EU compliant food-grade quality
- electro-galvanized or stainless steel execution
- equipotential equalization
- other colors
- other diameters
- other sheet thickness, depending on length and diameter
- other types of edges or connections

Ø d mm	Code	L mm	A x B mm	s mm	Weight kg
150	BAAG000012	488	224 x 350	2.00	3.80
160	BAAG000013	488	224 x 350	2.00	4.43
175	BAAG000014	488	224 x 350	2.00	4.84
200	BAAG000015	488	224 x 350	2.00	5.53
224	BAAG000016	488	224 x 350	2.00	6.20
250	BAAG000017	488	350 x 350	2.00	6.92
280	BAAG000018	488	350 x 350	2.00	7.75
300	BAAG000019	488	350 x 350	2.00	8.30
315	BAAG000020	488	350 x 350	2.00	8.72
350	BAAG000021	488	350 x 350	2.00	9.68
400	BAAG000022	488	350 x 350	2.00	11.07
450	BAAG000023	488	500 x 350	2.00	12.45
500	BAAG000024	488	500 x 350	2.00	13.83
550	BAAG000025	488	500 x 350	2.00	15.22
560	BAAG000026	488	500 x 350	2.00	15.49
600	BAAG000027	488	500 x 350	2.00	16.60
630	BAAG000028	488	500 x 350	2.00	17.43