


BACA Branches at 45°



BACA Branches at 45°

Full welded cylindrical branches at 45° with three same diameters with a sheet thickness of 2.00 mm.

These branches are suitable for the transport of waste materials such as dust and chips but also for the transport of grains and such.

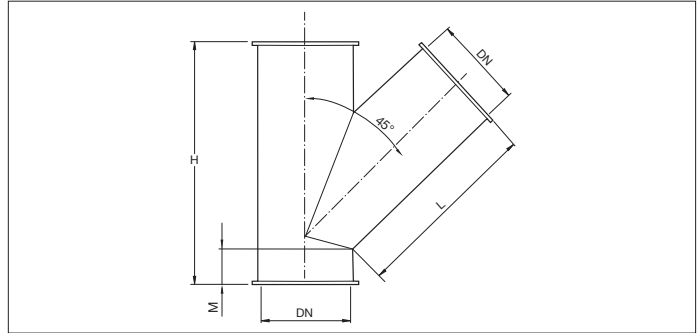

Material

2.00 mm black steel 1.0330 powder coated in RAL 7032.
Electrostatically conductive and food-safe powder coating thickness of 30 to 60 µm.
Temperature resistance up to +80°C.

Type

Rolled sheets with 6 mm edges for lock rings.

Options

- FDA and EU compliant food-grade quality
- hot-dipped galvanized or stainless steel execution
- wear resistant lining as of Ø150 (83° Shore)
- equipotential equalization
- other colors
- other diameters
- other sheet thickness, depending on length and diameter
- other types of edges or connections

Ø d mm	Code	H mm	L mm	M mm	s mm	Weight kg
100	BACA000022	215	155	17	2.00	1.89
120	BACA000023	240	160	28	2.00	2.41
140	BACA000024	280	190	35	2.00	3.26
150	BACA000025	290	210	15	2.00	3.79
160	BACA000026	320	220	35	2.00	4.31
175	BACA000027	340	230	35	2.00	4.99
200	BACA000028	390	265	40	2.00	6.55
224	BACA000029	420	290	40	2.00	7.88
250	BACA000030	450	300	40	2.00	9.32
280	BACA000031	500	340	40	2.00	11.66
300	BACA000032	520	350	40	2.00	12.90
315	BACA000033	560	385	45	2.00	14.66
350	BACA000034	615	400	45	2.00	17.93
400	BACA000035	685	450	45	2.00	22.77
450	BACA000036	800	530	45	2.00	30.51
500	BACA000037	850	570	45	2.00	35.59
550	BACA000038	920	620	45	2.00	42.28
560	BACA000039	950	670	45	2.00	44.72
600	BACA000040	990	670	45	2.00	49.54
630	BACA000041	1060	760	45	2.00	56.21