


**BADD Balance dampers**

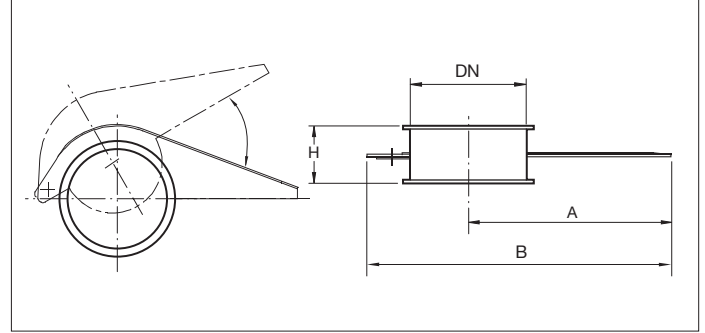

**BADD Balance dampers**

Full welded balance dampers to open or close a ducting line in an installation (no possibility to regulate).

For mounting on horizontal ducting. Opening and closing is done by rope or chain (not sold with the damper).

**Material**

1.50 mm powder coated black steel in RAL 7032. Electrostatically conductive and food-safe powder coating thickness of 30 to 60 µm. Temperature resistance up to +80°C.

**Type**

Rolled sheets with 6 mm edges for lock rings.

**Options**

- FDA and EU compliant food-grade quality
- electro-galvanized execution
- equipotential equalization
- other colors
- other types of edges or connections

Ø d mm	Code	A mm	B mm	H mm	s mm	Weight kg
100	BADD000001	175	270	50	1.50	0.47
120	BADD000002	177.5	283	50	1.50	0.60
150	BADD000003	205	330	50	1.50	0.80
175	BADD000004	385	530	50	1.50	1.20
200	BADD000005	398	553	50	1.50	1.40
250	BADD000006	423	603	70	1.50	1.70

FA.T01.IDPAINTED.NSV4.2.2022.EN