


BAZL Adapters

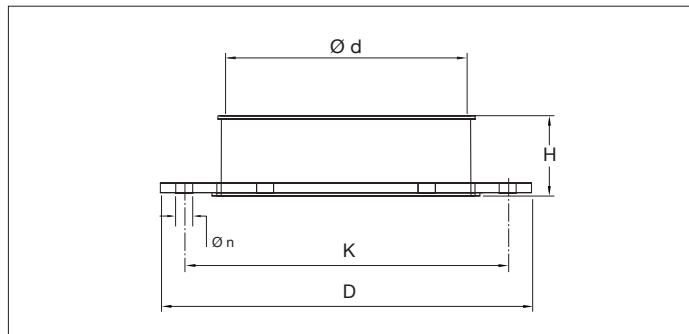

BAZL Adapters

Full welded adapters with loose flange designed for the transition between different ducting elements or machinery.

These adapters are suitable for the transport of waste materials such as dust and chips but also for the transport of grains and such.

The loose flange is Reihe II (T2) according to DIN 24154.

Material

2.00 mm black steel 1.0330 powder coated in RAL 7032. Electrostatically conductive and food-safe powder coating thickness of 30 to 60 µm. Temperature resistance up to +80°C.

Type

Rolled sheets with 6 mm edge for lock rings. Including loose flange Reihe II (T2).

Options

- FDA and EU compliant food-grade quality
- hot-dipped galvanized or stainless steel execution
- wear resistant lining as of Ø150 (83° Shore)
- equipotential equalization
- other colors
- other diameters or dimensions
- other types of edges or connections

Ø d mm	Code	Ø D mm	Ø K mm	Ø n mm	# of holes	H mm	s mm	Weight kg
100	BAZL000002	165	139	9.5	4	50	2.00	0.85
120	BAZL000003	185	165	9.5	4	50	2.00	0.90
140	BAZL000004	212	182	11.5	8	50	2.00	1.25
150	BAZL000005	225	191	11.5	8	50	2.00	0.90
160	BAZL000006	234	200	11.5	8	50	2.00	1.30
175	BAZL000007	250	219	11.5	8	50	2.00	1.54
200	BAZL000008	275	241	11.5	8	50	2.00	1.70
224	BAZL000009	295	265	11.5	8	50	2.00	1.86
250	BAZL000010	326	292	11.5	8	50	2.00	2.13
280	BAZL000011	363	332	11.5	8	50	2.00	3.20
300	BAZL000012	385	349	11.5	8	50	2.00	3.45
310	BAZL000013	398	366	11.5	8	50	2.00	3.59
350	BAZL000014	435	405	11.5	8	50	2.00	3.98
400	BAZL000015	488	448	11.5	12	50	2.00	4.41
450	BAZL000016	537	497	11.5	12	50	2.00	4.93
500	BAZL000017	587	551	11.5	12	50	2.00	5.46
550	BAZL000018	655	605	14	16	50	2.00	7.28
560	BAZL000019	664	629	14	16	50	2.00	7.31
600	BAZL000020	704	665	14	16	50	2.00	7.81
630	BAZL000021	734	698	14	16	50	2.00	8.18