
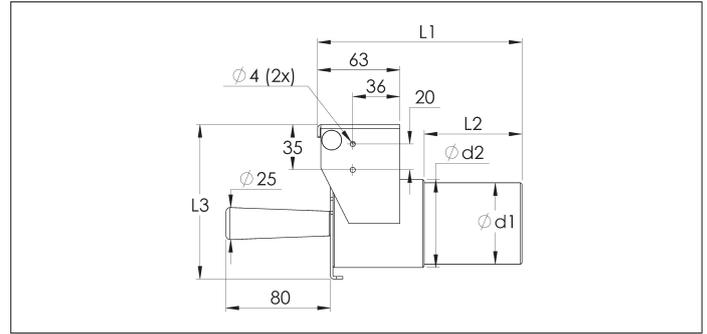


CADC SL Leaf valves

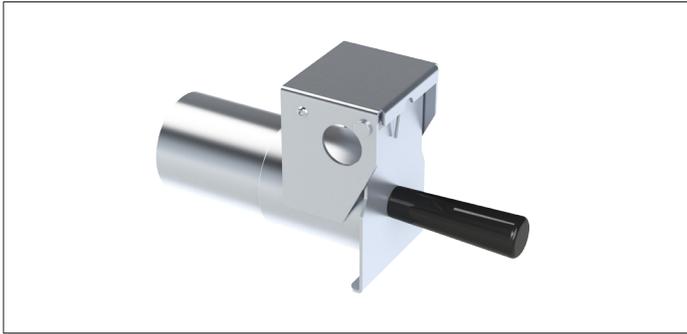

CADC SL Leaf valves

The CADC SL leaf valves can be mounted on the ducting and are designed to connect flexible hoses by means of a flexible hose connector CAEB.

The pipe side of the leaf valve is the same diameter as the pipe and is connected by means of a pipe connector.

A position indicator can be added to the lid support to automatically start the installation when the lid is opened (sold separately).

Material

2 mm electro-galvanized blacksteel (10µm).

Type


With a self-closing spring-mounted lid.

Options

- Position indicator (NCED000038)

Type	Code	d1 Ø mm	d2 Ø mm	L1 mm	L2 mm	L3 mm	Weight kg
38-38	CADC000004	38	43	157	75	94,5	0.70
50-50	CADC000005	50	55	157	75	106,5	0.90
63-63	CADC000006	63	68	157	75	119,5	1.25
76-76	CADC000007	76	81	157	75	132,5	1.46

CBDE SL Leaf valves

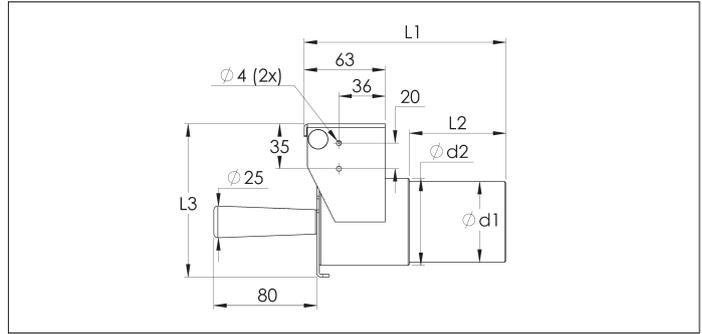

CBDE SL Leaf valves

The CBDE SL leaf valves can be mounted on the ducting and are designed to connect flexible hoses by means of a flexible hose connector CBEB.

The pipe side of the leaf valve is the same diameter as the pipe and is connected by means of a pipe connector.

A position indicator can be added to the lid support to automatically start the installation when the lid is opened (sold separately).

Material

2 mm stainless steel AISI 304.

Type

With a self-closing spring-mounted lid.

Options

- Position indicator (NCED000038)

Type	Code	d1 Ø mm	d2 Ø mm	L1 mm	L2 mm	L3 mm	Weight kg
38-38	CBDE000001	38	43	157	75	94,5	0.70
50-50	CBDE000002	50	55	157	75	106,5	0.90
63-63	CBDE000003	63	68	157	75	119,5	1.25
76-76	CBDE000004	76	81	157	75	132,5	1.46