

Description

A flexible silencer that can be adapted to any installation situation. The bendability of the silencer allows adaptation to very confined spaces and difficult wiring.

Silencers are made from 2-layer, flexible aluminium tubes.


The inner tube is micro-perforated, and between the inner and outer tubes is a 50 mm thick attenuation material layer of glass wool.

The attenuation material reduces the noise passing through the silencer. The ends of the silencer are covered with aluminium gables. The duct connections fit inside ducts.

It comes in the dimensions Ø80-250 mm and 1000 mm in length (also available in lengths of 750, 1250, 1500, and 2000 mm). The silencers can withstand temperatures up to 200°C.



Dimensions

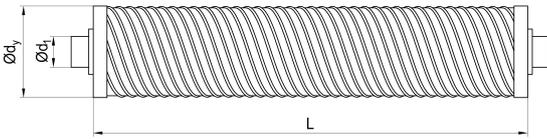


Ød _i mm	l mm	63	125	250	500	1k	2k	4k	8k	Ød _y mm	m kg
80	750									190	
	1000	3	13	19	30	47	58	33	28	190	1,10
	1250									190	
	1500									190	
	2000									190	
100	750									210	
	1000	2	11	16	28	46	58	36	36	210	1,30
	1250									210	
	1500									210	
	2000									210	
125	750									235	
	1000	1	7	13	24	41	45	29	28	235	1,70
	1250									235	
	1500									235	
	2000									235	
160	750									260	
	1000	1	5	10	21	39	30	20	18	260	1,90
	1250									260	
	1500									260	
	2000									260	
200	750									310	
	1000	3	4	9	16	32	22	15	15	310	2,40
	1250									310	

Semiflexible Silencer

Ød _{1 non} mm	l mm	63	125	250	500	1k	2k	4k	8k	Ød _y mm	m kg
200	1500										310
	2000										310
250	750										365
	1000	2	4	8	16	33	15	11	12	365	3,00
	1250										365
	1500										365
	2000										365
315	750										410
	1000	2	3	6	12	25	11	8	11	410	3,40
	1250										410
	1500										410
	2000										410

Weight can vary ±10%

Order code

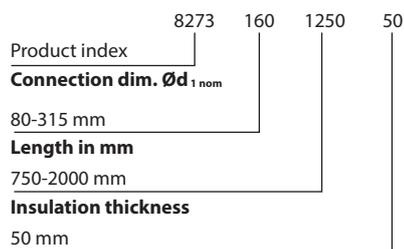

Example: 8273 - 160 - 1250 - 50