

Description


The Shut-off dampers are designed for cladding with up to 50 mm thick insulation.

They are a good choice when the ductwork closure must be airtight. The damper closure position can be read on the 0 deg to 90 deg dial of the control handle. The damper closure opening ratio can be fixed with a screw.

Standard dampers are made from galvanized steel sheet. Others are available on request.



Dimensions

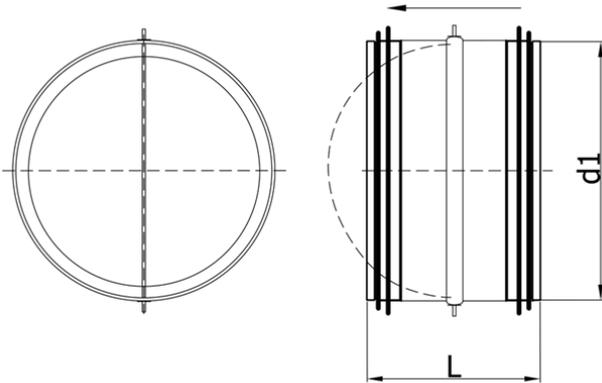

Ød nom	L mm	m kg
80	130	0,2
100	130	0,2
125	130	0,3
160	130	0,4
180	130	0,4
200	130	0,5
224	190	0,6
250	190	0,7
280	190	0,8
300	190	0,9
315	190	1,0

Weight can vary ±10%

Order code

Product index 8232 200
Dimension Ød

Example: 8232200 - Ø200