


## Description

Slide-in female coupling. They can be used for connecting fittings to spiral ducts without a press-in stop. If there is no press-in stop in the ducts, the end's insertion length can be freely adjusted. It is a popular solution for ventilation ducts continuously exposed to temperature variations which affect thermal expansion and shrinking of the ductwork. The fitting is also perfect for connecting fire dampers to the ductwork.

Also available in other dimensions up to Ø400.



## Dimensions

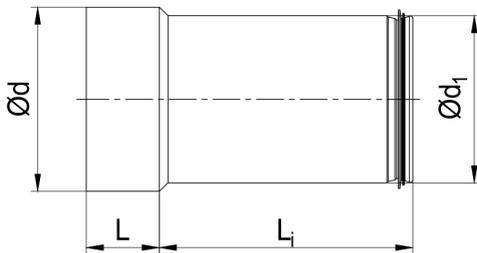

Ød nom	L <sub>i</sub> mm	L mm	m kg
80	150	40	0,2
	300	40	0,3
	500	40	0,7
100	150	40	0,2
	300	40	0,4
	500	40	0,8
125	150	40	0,3
	300	40	0,5
	500	40	1,0
160	150	40	0,3
	300	40	0,6
	500	40	1,3
180	150	40	0,4
	300	40	0,7
	500	40	1,5
200	150	40	0,5
	300	40	1,0
	500	40	1,7
224	150	40	0,6
	300	40	1,1
	500	40	1,9
250	150	60	0,9
	300	60	1,3
	500	60	2,1
280	150	60	1,2
	300	60	1,6
	500	60	2,5
300	150	60	1,4
	300	60	2,9
	500	60	3,1
315	150	60	1,6
	300	60	3,2
	500	60	3,5

## Order code

Product index 8263 200 150  
Dimension Ød<sub>1</sub>  
Nominal length L

**Example: 8263200150 - Ø200 \* Ø150**

Weight can vary ±10%