

Description

Male-end flexible duct connectors are used for joining two round SPIRAL or plain ducts. They are most often used for connecting air handling units, heat recuperation units, and duct fans. The flexible duct connector deadens the vibration generated by the equipment to prevent vibration and noise in the ductwork and ensure improved acoustic performance of the ventilation system.


The flexible piece is made from AMT balancing tape, a standalone product available in different sizes and materials, including a heat-resistant version.

The standard version is male.

The female-ended version is available on request for connecting two fittings.



Dimensions

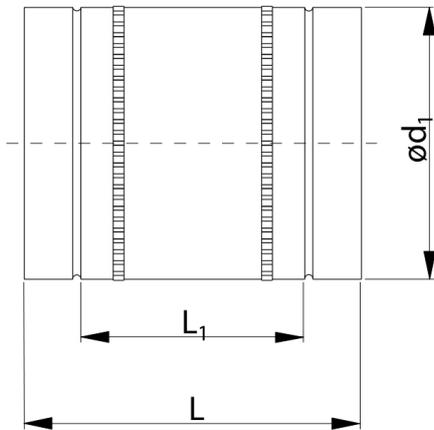

$\varnothing d_1$ nom	t mm
80	0,5
100	0,5
125	0,5
140	0,5
150	0,5
160	0,5
180	0,5
200	0,5
224	0,5
250	0,5
280	0,6
300	0,6
315	0,6

Order code

Product _____ 8265 _____ 80
Dimension $\varnothing d_1$ _____

Example: 826580-Ø80