


Description

The reducer is double-jacketed and insulated with mineral wool, and is supplied with rubberseal on the inner dimensions.



Dimensions

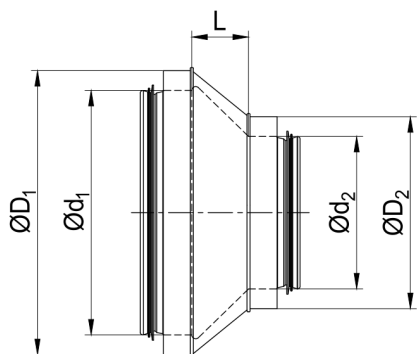

Ød _{nom}	Ød _{nom}	ØD _{nom}	ØD _{nom}	L mm	m kg
100	80	132	112	63	0,3
125	80	157	112	75	0,4
	100	157	132	66	0,4
160	80	192	112	94	0,7
	100	192	132	85	0,6
	125	192	157	72	0,6
180	80	200	112	212	1,1
	100	200	132	185	1,0
	125	200	157	151	1,0
	160	200	192	103	0,8
200	80	232	112	240	1,3
	100	232	132	92	0,8
	125	232	157	92	0,7
	160	232	192	78	0,7
	180	232	200	103	0,9
224	80	260	112	277	1,5
	100	260	132	245	1,6
	125	260	157	211	1,5
	160	260	192	163	1,3
	180	260	200	135	1,2
	200	260	232	107	1,1
250	80	280	112	332	2,0
	100	280	132	301	2,0

Order code

Product index 8434 100 80
Dimension Ød₁
Dimension Ød₂

Example: 843410080 - Ø100 * Ø80

Concentric Reducer

Ød ₁ nom	Ød ₂ nom	ØD _{nom}	ØD _{nom}	L mm	m kg
250	125	280	157	137	1,4
	160	280	192	115	1,1
	180	280	200	191	1,6
	200	280	232	103	1,1
	224	280	260	131	1,4
280	80	315	112	379	2,2
	100	315	132	347	2,3
	125	315	157	308	2,4
	160	315	192	260	2,2
	180	315	200	232	2,1
	200	315	232	205	2,0
	224	315	260	172	1,8
	250	315	280	136	1,8
300	80	355	112	410	2,5
	100	355	132	379	2,5
	125	355	157	335	2,7
	160	355	192	287	2,5
	180	355	200	260	2,4
	200	355	232	232	2,3
	224	355	260	200	2,2
	250	355	280	164	2,1
	280	355	315	123	1,9
315	80	355	112	425	2,7
	100	355	132	394	2,8
	125	355	157	356	3,0
	160	355	192	308	2,8
	180	355	200	281	2,6
	200	355	232	253	2,5
	224	355	260	220	2,4
	250	355	280	184	2,3
	280	355	315	143	2,1
	300	355	355	116	2,0

Weight can vary ±10%

Order code

Product index 8434 100 80
Dimension Ød₁ _____
Dimension Ød₂ _____

Example: 843410080 - Ø100 * Ø80