


Description

The coupling is double-jacketed and supplied with rubber seal on the inner dimension and used when connecting insulated ducts. With distance ensuring that the parts are centered.




Dimensions

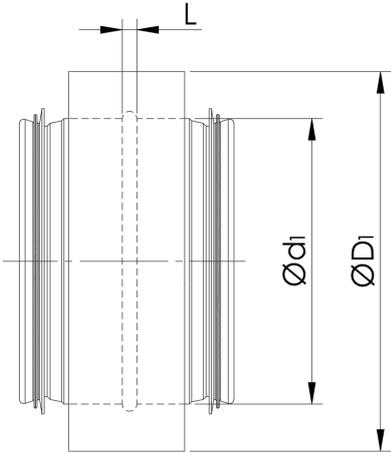

Ød _i nom	ØD _i nom	L mm	m kg
80	112	8	0,2
100	132	8	0,3
125	157	8	0,3
160	192	8	0,4
180	200	8	0,4
200	232	10	0,5
224	260	10	0,6
250	280	10	0,9
280	315	10	1,1
300	355	10	1,1
315	355	10	1,3

Weight can vary ±10%

Order code



Example: 8452200 - Ø200