



Description


STRETCHDEC is a superb flexible duct constructed of one layer of corrugated aluminium.

By the inter lockseam a high airtightness and flexibility is reached.

Construction

Total layers: 1 of 95micron

Pressure Loss (Straight Duct)

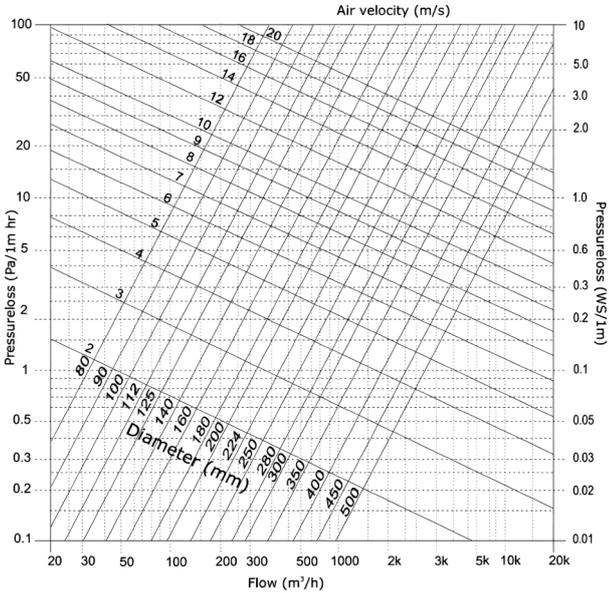

Specification

- Temperature range: -30°C to 250°C, Peak 400°C
- Operating pressure: up to +3000 Pa
- Operating air velocity: max. 30 m/s
- Bending radius: min. 1 x Ø
- Standard diameter range: 80 – 315 mm
- Standard length: 3 mtr

Ød nom
80
100
125
150
160
180
200
224
250
300
315

Order code

Product _____ 9183
 Dimension Ød _____ 82

Example: 918382-Ø82