


**Mounting brackets GAEG for ceiling mounting**

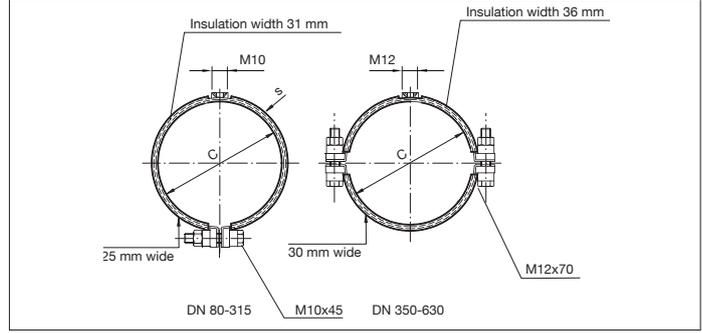

**Mounting brackets GAEG for ceiling mounting**

For the suspension of ducting on an existing structure. Delivered with 1x bolt M10x45 (Ø80 to 315), or 2x bolts M12x70 (Ø350 to 630).

Can be mounted on a threaded rod (GAZF) by means of the integrated M10 (Ø80 to 315), or M12 (Ø350 to 630) connection.

**Material**

Galvanized steel  
EPDM seal, Temperature range -20°C up to +90°C

**Options**

- stainless steel AISI 304 (GBEG)

Ø	Code	Width mm	s mm	Weight kg
80	GAEG000001	25	1.5	0.20
100	GAEG000002	25	1.5	0.24
120	GAEG000003	25	1.5	0.28
140	GAEG000004	25	1.5	0.32
150	GAEG000005	25	1.5	0.34
160	GAEG000006	25	1.5	0.35
175	GAEG000007	25	1.5	0.38
200	GAEG000008	25	1.5	0.42
224	GAEG000009	25	1.5	0.46
250	GAEG000010	25	1.5	0.49
280	GAEG000011	25	1.5	0.52
300	GAEG000012	25	1.5	0.56
315	GAEG000013	25	1.5	0.58
350	GAEG000014	30	2.5	1.15
400	GAEG000015	30	2.5	1.31
450	GAEG000016	30	2.5	1.47
500	GAEG000017	30	2.5	1.61
550	GAEG000018	30	2.5	1.76
560	GAEG000019	30	2.5	1.81
600	GAEG000020	30	2.5	1.89
630	GAEG000021	30	2.5	1.97