


FK cyclones

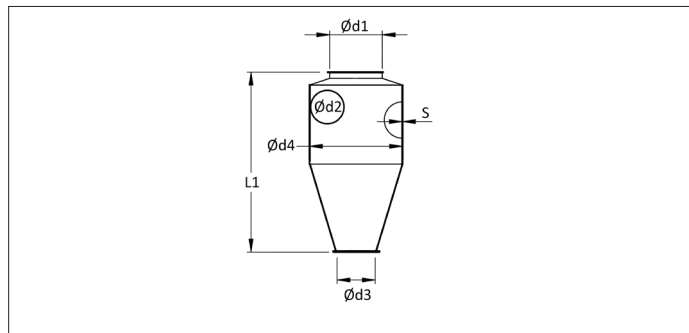

FK cyclones

Used for granules in the plastic industry.

Generally the FK cyclone is suitable for all installations that do not require a high performance separation.

Material


Sendzimir galvanized steel

Type

1 mm rolled plates welded together
Hopper and body lockformed

Options

- Stainless steel (AISI 304L or 316L)
- Painted
- Reinforced

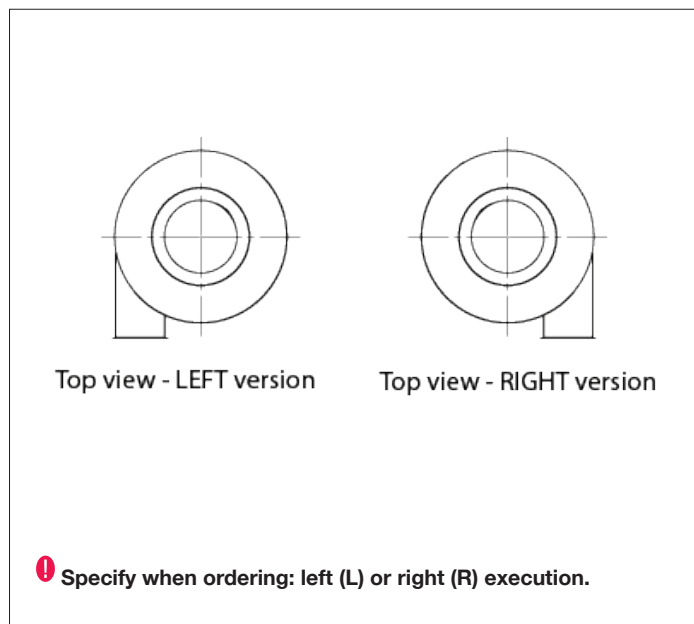

Model	Air volume (m³/h)	L1 (mm)	Ø d1 (mm)	Ø d2 (mm)	Ø d3 (mm)	Ø d4 (mm)	s (mm)
FK 1	1100 -> 2000	800	150	160	150	600	1.0
FK 2	1300 -> 2300	830	200	160	160	600	1.0
FK 3	1300 -> 2000	500	200	160	160	600	1.0