

YOGA - Extraction arms




Coupling ferrule with flange

Coupling ferrule with flange to connect a flexible hose, or ducting to the wall support.

Material

St 37.2 black steel powder coated Sendzimir plate

For model	Code	Dn (mm)	Hole pattern (mm)	Weight (kg)
YOGA M/ & K	KAZX000001	125	6 x Ø6.5 on Ø110	0.5
YOGA-L	KAZX000002	160	6 x Ø6.5 on Ø160	0.7
YOGA-D	KAZX000003	200	8 x Ø9.5 on Ø195	0.9




Wall support

Wall support to mount extraction arm directly on a wall or structure.

Material

St 37.2 black steel powder coated

For model	Code	Dn (mm)	S (mm)	Weight (kg)
YOGA M/ & K	KAZA000001	125	250	3.0
YOGA-L	KAZA000003	160	320	4.6
YOGA-D	KAZA000004	200	340	6.1



Suction hood

Standard model with integrated handle.
Also available with integrated halogen light.

Material

ABS plastic

For model	Code group	Z (mm)	T (mm)	H (mm)	Weight (kg)
YOGA M	KAZC	330	100	190	0.35
YOGA-K	KAZC	330	125	190	0.44
YOGA-L	KAZC	365	170	190	0.42
YOGA-D	KAZC	415	210	190	0.53



Replacement grill

To insure that no bigger particles are sucked in the arm.


Material

Wire mesh

For model	Code Group	Weight (kg)
YOGA M/ & K	KAZD	0.08
YOGA-L	KAZD	0.10
YOGA-D	KAZD	0.15

YOGEX - ATEX Extraction arms

Pressure loss on extraction arm type YOGEX

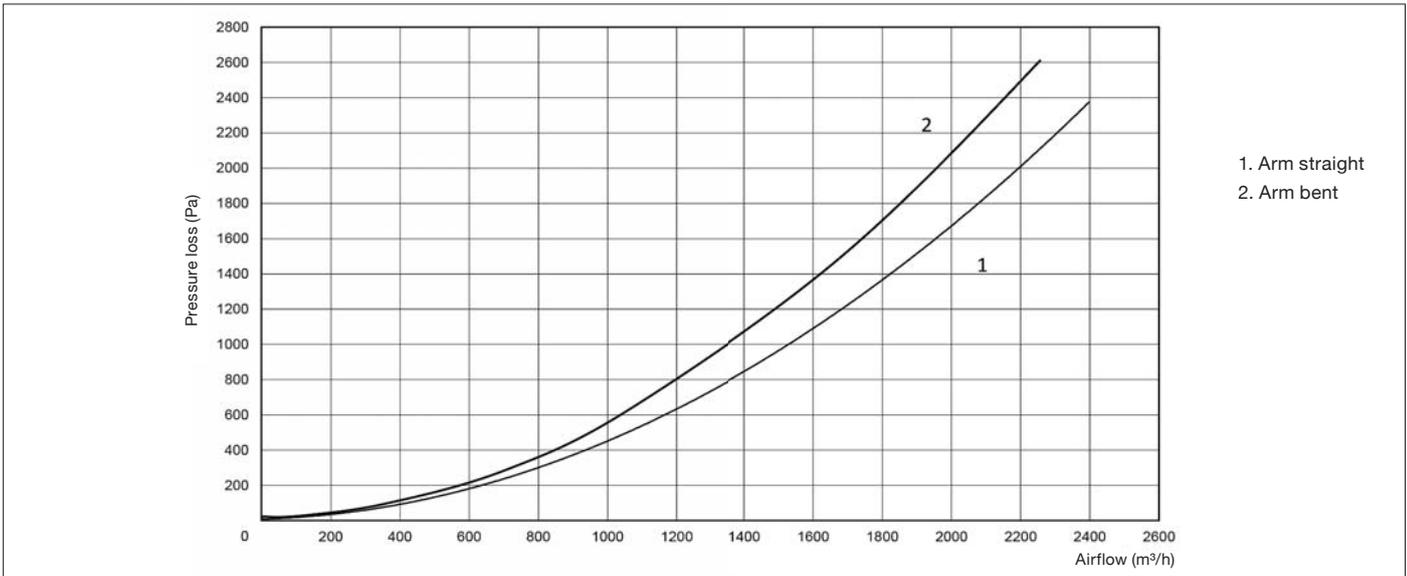

1. Arm straight
2. Arm bent



Coupling ferrule with flange

Coupling ferrule with flange to connect a flexible hose, or ducting to the wall support.

Material
AISI 304 (1.4301)

For model	Code	Dn (mm)	S (mm)	Weight (kg)
YOGEX-L	KAZX000004	160	6 x Ø6.5 on Ø160	0.7




Wall support

Wall support to mount extraction arm directly on a wall or structure.

Material
AISI 304 (1.4301)

For model	Code	Dn (mm)	S (mm)	Weight (kg)
YOGEX-L	KAZA000005	125	250	3.0

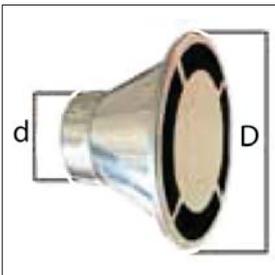

Suction hood

Standard model

Material
AISI 304 (1.4301)

For model	Code	d (mm)	D (mm)	H (mm)	Weight (kg)
YOGEX-L	KAZC	330	100	109	1.3