
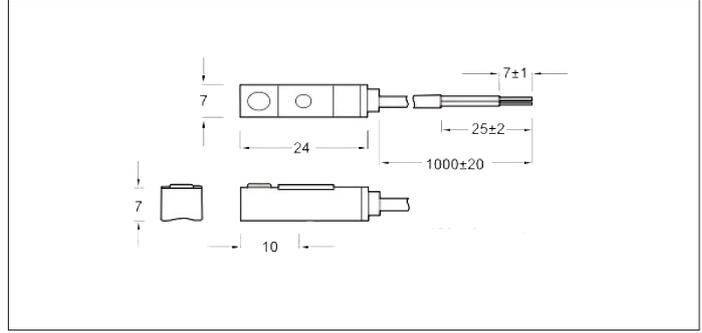


**NCEC Reed contact for NDBB Pneumatic cylinder for sliding dampers**

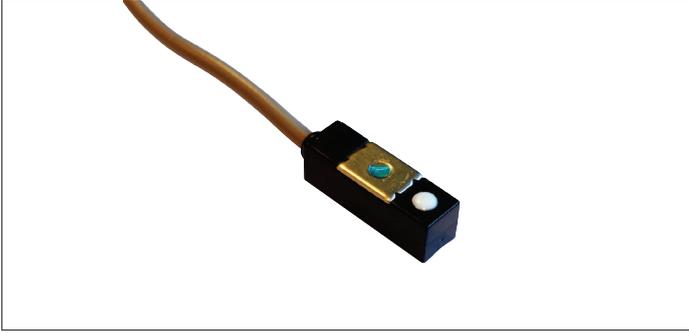

**NCEC Reed contact for NDBB Pneumatic cylinders for sliding dampers**

Metal casing reed contact to strap on cylinder to indicate position of cylinder.

Usually mounted on the two extremities of the cylinder.

Supplied with mounting strap and integrated 1.5 m cable.

**Material**

Metal casing with LED indicator.  
Oil resistant PVC coated 1.5 m cable.

**Type**

2 wire type.

**Other information**


- temperature range : -5°C up to +60°C
- operating voltage : 5 to 240 V DC-AC
- max. switching current : 100 mA
- power consumption : none
- protection level : IP 67 (NEMA 6)

**Options**

- 3 wire version
- 5 m cable version



Reed contact supplied with strap to fix to cylinder

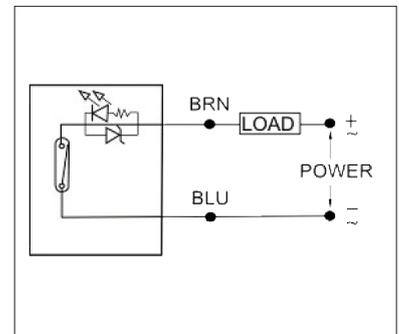

Wiring diagram of reed contact

Model	Code	Weight kg
Reed contact	NCEC000001	0.10