


AADG Air bleeds

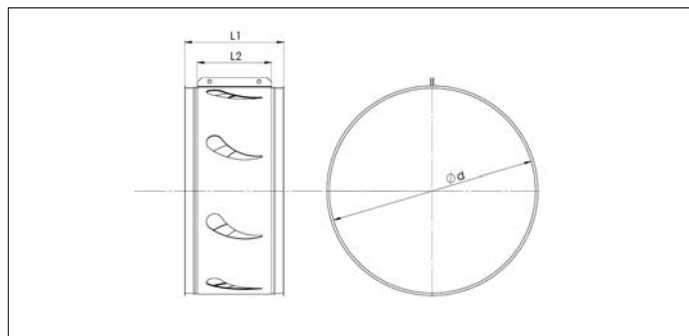

AADG Air bleeds

The air bleeds are designed to regulate the airflow in an installation by drawing in outside air for use in under-pressure and pressureless systems.

The outer mantle can be turned to open or close the openings and it is held in place by two star knobs.

Material

Senzimir galvanized DX51 DZ 275 MAC.
POM star knobs.

Type

Rolled sheets, stitch-welded, with 6 mm edges for lock rings.
Provided with star-knob.

Options

- other diameters
- other sheet thicknesses depending on diameter and length
- other types of edges or connections



Air bleed star knob locking system

Ø	Code	L1 mm	L2 mm	s mm	Weight kg
80	AADG000001	240	180	0.88	0.85
100	AADG000002	240	180	0.88	1.02
120	AADG000003	240	180	0.88	1.20
125	AADG000021	240	180	0.88	1.25
140	AADG000004	240	180	0.88	1.37
150	AADG000005	240	180	0.88	1.55
160	AADG000006	240	180	0.88	1.59
180	AADG000007	240	180	0.88	1.70
200	AADG000008	240	180	0.88	1.90
225	AADG000009	240	180	0.88	2.16
250	AADG000010	240	180	0.88	2.40
275	AADG000011	240	180	0.88	2.65
280	AADG000022	240	180	0.88	2.70
300	AADG000012	240	180	0.88	2.90
315	AADG000013	240	180	0.88	3.00
350	AADG000014	240	180	0.88	3.38
400	AADG000015	240	180	0.88	4.01
450	AADG000016	240	180	0.88	4.80
500	AADG000017	240	180	0.88	5.10
550	AADG000018	240	180	0.88	5.30
600	AADG000019	240	180	0.88	5.70
630	AADG000020	240	180	0.88	6.10