


BAAA Welded pipes - 2000 mm



BAAA Welded pipes - 2000 mm

Longitudinally welded pipes with a sheet thickness of 2.00 mm.

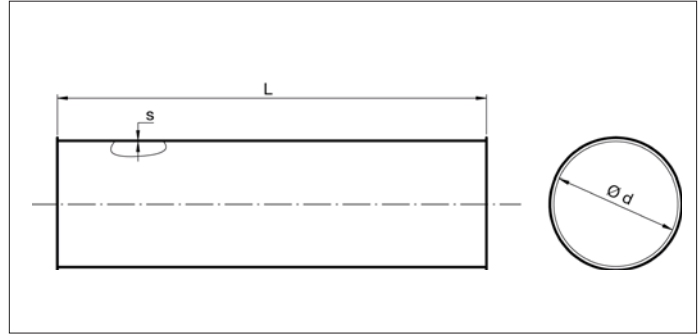

Material

2.00 mm black steel 1.0330 powder coated in RAL 7032.
Electrostatically conductive and food-safe powder coating thickness of 30 to 60 µm.
Temperature resistance up to +80°C.

Type

Rolled sheets with 6 mm edges for lock rings.

Options

- FDA and EU compliant food-grade quality
- hot-dipped galvanized or stainless steel execution
- wear resistant lining as of Ø150 (83° Shore)
- equipotential equalization
- other colors
- other lengths
- other diameters
- other sheet thicknesses, depending on length and diameter
- other types of edges or connections

Ø d mm	Code	L mm	s mm	Weight kg
100	BAAA000092	1988	2.00	10.01
120	BAAA000093	1988	2.00	12.03
140	BAAA000094	1988	2.00	14.06
150	BAAA000095	1988	2.00	15.07
160	BAAA000096	1988	2.00	16.08
175	BAAA000097	1988	2.00	17.60
200	BAAA000098	1988	2.00	20.13
224	BAAA000099	1988	2.00	22.55
250	BAAA000100	1988	2.00	25.18
280	BAAA000101	1988	2.00	28.22
300	BAAA000102	1988	2.00	30.24
315	BAAA000103	1988	2.00	31.76
350	BAAA000104	1988	2.00	35.30
400	BAAA000105	1988	2.00	40.35
450	BAAA000106	1988	2.00	45.41
500	BAAA000107	1988	2.00	50.47
550	BAAA000108	1988	2.00	55.52
560	BAAA000109	1988	2.00	56.53
600	BAAA000110	1988	2.00	60.58
630	BAAA000111	1988	2.00	63.61