

BADH Non-return valves




BADH Non-return valves

Full welded manual non-return valves with counterweight.

Assembled with two-part ring for easy opening in case of obstruction or material build-up.

The counter weight can be locked in the desired position by a butterfly nut for optimal airflow.

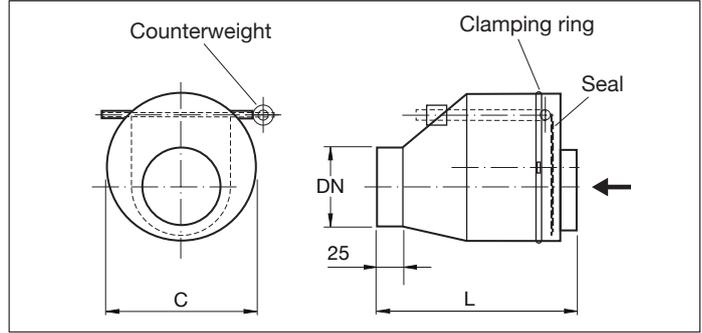

Material

2.00 mm black steel 1.0330 powder coated in RAL 7032.

Electrostatically conductive and food-safe powder coating thickness of 30 to 60 µm.

Temperature resistance up to +80°C.

Type


Rolled sheets with 6 mm edges for lock rings.

Options

- FDA and EU compliant food-grade quality
- stainless steel execution
- wear resistant lining as of Ø150 (83° Shore)
- equipotential equalization
- other colors
- other types of edges or connections



Adjustable counterweight

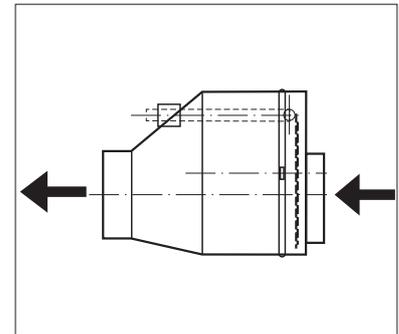

Think of airflow when installing

Ø d mm	Code	C mm	L mm	s mm	Weight kg
100	BADH000002	174	230	2.00	5.38
120	BADH000003	199	255	2.00	6.45
140	BADH000004	249	280	2.00	8.40
150	BADH000005	249	280	2.00	9.40
160	BADH000006	249	315	2.00	9.60
175	BADH000007	299	315	2.00	10.50
200	BADH000008	299	350	2.00	11.60
224	BADH000009	299	415	2.00	13.40
250	BADH000010	349	415	2.00	15.10
280	BADH000011	449	480	2.00	16.80
300	BADH000012	449	480	2.00	19.80
315	BADH000013	449	550	2.00	21.00